

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 November 2000 (30.11.2000)

PCT

(10) International Publication Number
WO 00/72634 A1

(51) International Patent Classification⁷: H05B 3/86, (74) Agents: FARMER, Guy et al.; Glaverbel, Intellectual
H01Q 1/12 Property Dept., Centre R & D, Rue de l'Aurore, 2, B-6040
Jumet (BE).

(21) International Application Number: PCT/EP00/04199

(22) International Filing Date: 1 May 2000 (01.05.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
99201566.9 20 May 1999 (20.05.1999) EP

(71) Applicant (for all designated States except US):
GLAVERBEL [BE/BE]; Chaussee de la Hulpe, 166,
B-1170 Brussels (Watermael-Boitsfort) (BE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DEGAND, Etienne
[BE/BE]; Glaverbel - Centre R. & D., Rue de l'Aurore, 2,
B-6040 Jumet (BE). MAZA, Christophe [FR/FR]; Glaver-
bel - Centre R. & D., Rue de l'Aurore, 2, B-6040 Jumet
(BE).

(81) Designated States (national): AE, AL, AM, AT, AU, AZ,
BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK,
DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL,
IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU,
LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT,
RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA,
UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): Eurasian patent (AM, AZ,
BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AN AUTOMOTIVE GLAZING PANEL WITH SOLAR CONTROL COATING COMPRISING A DATA TRANSMISSION WINDOW

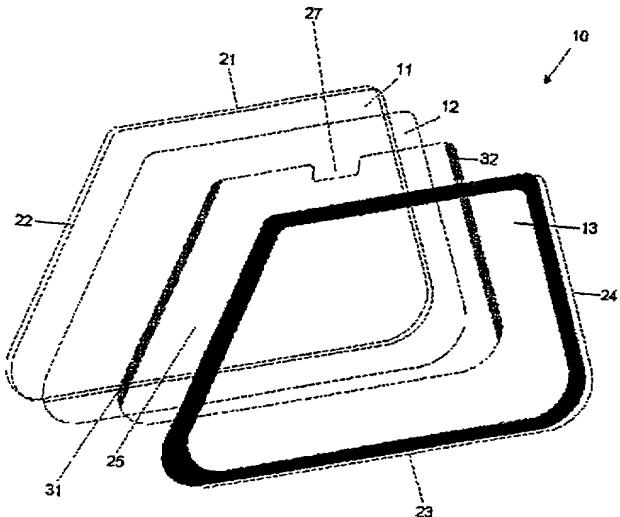

WO 00/72634 A1

(57) Abstract: An automotive glazing panel has an electrically heatable solar control coating layer, spaced first and second bus bars positioned respectively adjacent a first and a second side edge of the glazing panel and adapted to relay electrical power to the coating layer and a data transmission window positioned adjacent the top edge of the glazing. This arrangement may be used to alleviate or reduce perturbations to heating of the glazing panel caused by the presence of the data transmission window.